



Lighting Application Specialists (LIAS)

Preliminary Design

Project Name: Widows Row Belturbet R0

LIAS Reference: D479241

Key Account Manager: Seán Campbell

Email: Seán.Campbell@signify.com

Phone: +353 87 062 9330

Address: Suite 12, Plaza 256, Blanchardstown

Corporate Park 2, Dublin 15, Dublin, D15 TR96



Lighting Application Notes

This preliminary design is produced by the Lighting Application Specialist (LIAS) team of Signify based on information supplied by the Customer for the purpose of identifying suitable products and costing the proposal. This design cannot be used for Construction. This design does not purport to eliminate health and safety risks as a risk assessment has not been undertaken. Depending on the level of information received, a number of assumptions may have been applied in order to create an indicative lighting proposal and costing model, according to lighting industry guidelines and incorporating industry best practice methods. These assumptions are documented below and will require confirmation by the Principle Designer nor are we the PSDP (which is not Signify) during the detailed design phase.

Project Specific Comments/Assumptions

- Lighting Calculation has been produced to achieve Lighting Class as specified by Client
- Where column heights have not been provided/specified, these have been assumed to be 6m.
- It has been assumed that luminaires will be mounted post-top on outreach brackets).

Generic Comments/Assumptions (unless otherwise stated above)

- Preliminary Design proposals produced by the Signify LiAS Team are not to be used for installation purposes. It is the responsibility of the Principle Designer and/or Principle Contractor to ensure all Installation and Maintenance can be done in a safe manner, carried out by competent persons, based on their agreed Risk Assessments and Method Statements.
- The Luminaire Maintenance Factors have been based on 6-year cleaning intervals within an E3/E4 Environmental Zone and it is assumed that lamp/luminaire failures will be replaced on a 'spot replacement'.
- Energy consumptions have been based on the luminaire/s having Constant Light Output (CLO) enabled and the quoted wattage/s are the average over 100,000 hours (without dimming).
- The design calculations produced by Signify do not account for the effect obstructions, such as trees, will cause.
- Signify has not been provided with utility plans showing Buried, Above Ground or Overhead utilities. Therefore, all column/luminaire locations are indicative and are subject to review/verification by the Principle Designer.
- Unless stated otherwise, Signify has not visited site. Therefore, all column/luminaire locations are indicative and are subject to an onsite verification arranged/performed by the Principle Designer.
- Signify has not produced any Private Cable Network electrical calculations or reviewed the DNO network to confirm power supplies to the proposed lighting.
- Signify has not performed any asset condition testing and therefore assumes that any existing lighting columns/wall mounted brackets are structurally capable of supporting the weight & windage of the proposed luminaire/s. This must be verified by the Principle Designer before installation works commence.
- Unless stated otherwise, Signify is not supplying the new lighting columns (including brackets etc) and therefore it is the responsibility of the Principle Designers to confirm that all proposed equipment is suitable for the intended locations (e.g. raise & lower, ground condition, foundation type, saline environment, etc).
- Unless stated otherwise, luminaires will be supplied in their standard colour.
- **WARNING** - All proposed locations are only adversary and will need to be measured and set back from any ESNB low voltage assets 230v, any larger ESNB assets such as 400v or above. We advise you refer to the ESNB guidance docs on set back from ESNB assets before setting out the site or sending anyone to work. This will be down to the installation contractor to set out the column locations on site.

DATE: 17 October 2022
DESIGNER: Seán Campbell
PROJECT No: D479241
PROJECT NAME: Widows Row Belturbet R0



Using new locations indicated on the drawing plotted
All wattages with CLO Active & Dimming Profile 2A 12am to 6am
@Various mounting height, MF = 0.76 (E3/E4 zone 6yr clean)
Lantern A - 5Klm DW50 W 3000K
Grid 1 P4

Widows Row Belturbet R0



the meaning of light

Seán Campbell

Key Account Manager – Road Lighting Ireland,
BSc(Eng.), MSc, Interim CEng, MIEI, AMEI,
Signify Ireland +353 87 062 9330
Suite 12, 2nd Floor, Plaza 256,
Blanchardstown Corporate Park,
Dublin, D15 TR96, Ireland



A carbon neutral company



Our global brands are



Layout Report

General Data

Dimensions in Metres Angles in Degrees
Grid Origin -55.4m x 13.0m
Area 76.7m x 69.0m
Sample Spacing 1.47m x 1.50m

Luminaires

Luminaire A Data


Supplier	
Type	BGP291 DW50
Lamp(s)	LED-HB 5.2S 730
Lamp Flux (klm)	5.00
File Name	LumiStreet Gen2 Micro_BGP291_DW50_5000_20LED_5.2S_CLO_L90_730.ies
Maintenance Factor	0.76
Imax70,80,90(cd/klm)	609.4, 39.0, 0.0
No. in Project	3

Layout

ID	Type	X	Y	Height	Angle	Tilt	Cant	Out-reach	Target X	Target Y	Target Z
1	A	-21.51	27.31	6.00	211.00	5.00	0.00	0.40			
2	A	-32.44	56.28	6.00	146.00	5.00	0.00	0.40			
3	A	-10.18	73.77	6.00	130.00	5.00	0.00	0.40			

Horizontal Illuminance (lux)

Grid 1

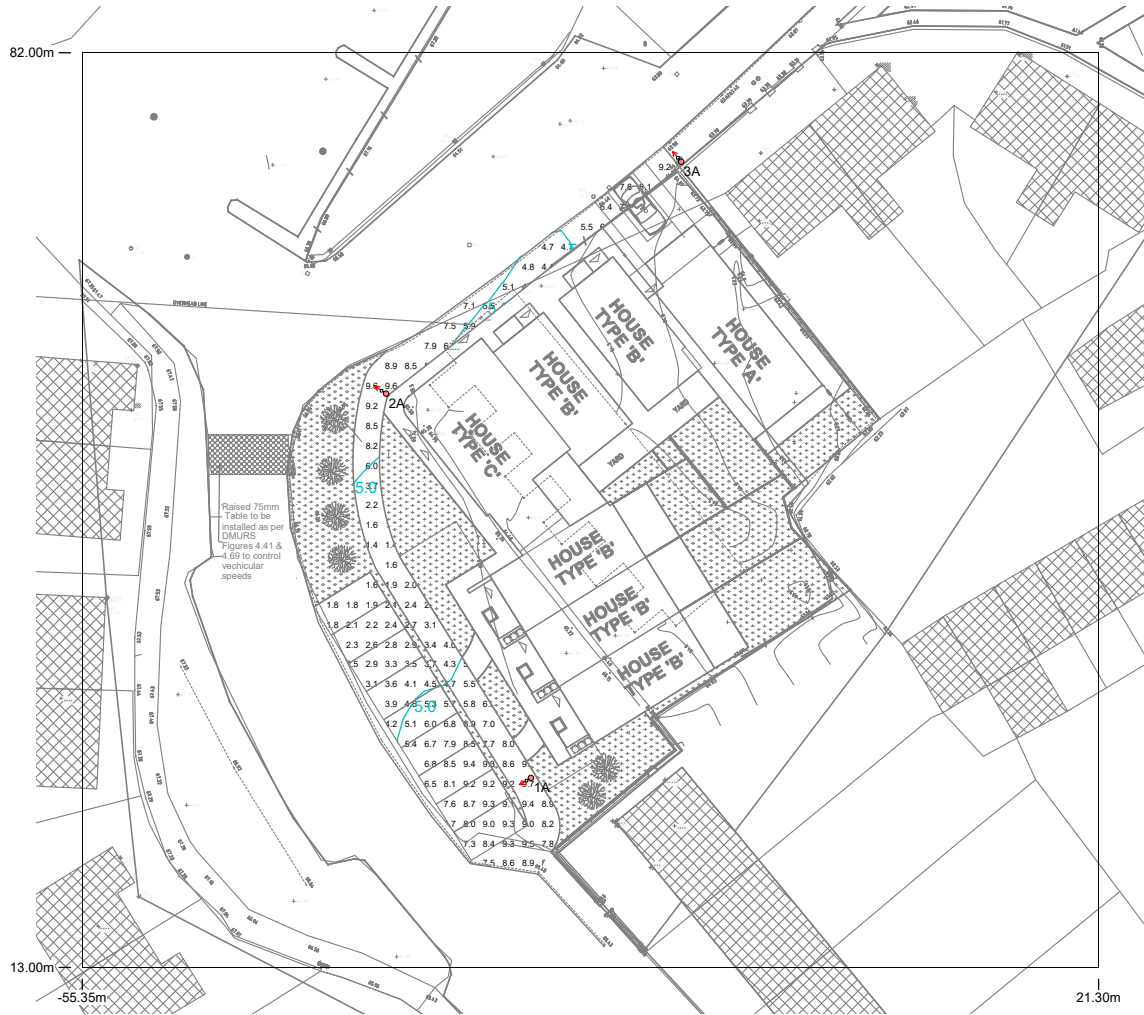

Results

Eav	5.91
Emin	1.39
Emax	9.69
Emin/Emax	0.14
Emin/Eav	0.23

Horizontal Illuminance (lux)

Grid 1

